


Paul Newhaus

Removal instruction 836665/837162/837444/837163

Instructions on how light sources and separate control gears can be removed without being permanently damaged for verification purposes by market surveillance authorities:

An Instruction on how to remove the light source from a containing product is provided for reference:




The removal may only be carried out by a professional.



Step 1: Knock out the end plug with a hammer.




Step 2: Pull the Acrylic out.

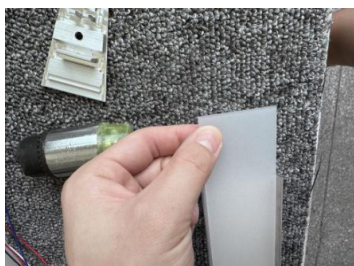


Step 3: Remove the screws fixing the LED Board.

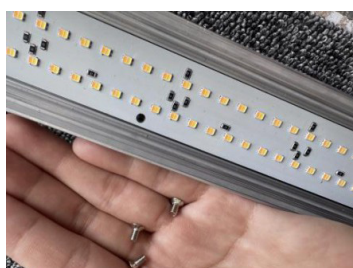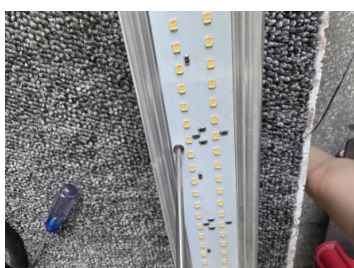

Step 4: Remove the wire from the board by using electric iron. Take care of the LEDs during this step, do not touch them.

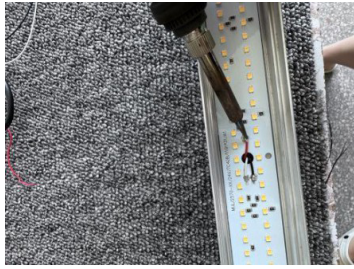

Step 5: Pull out the LED Board.

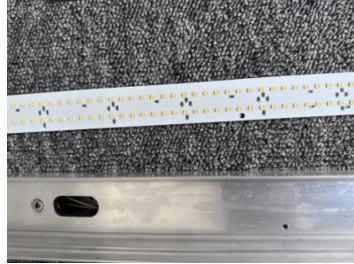

Step 6: Fix a new connection wire to the light source by using electric iron. Take care of the LEDs during this step, do not touch them.

Step 7: Provide the rated current to the light source and operate the ErP testing.